

# Resilient – Vandal-Resistant and Weatherproof Fluorescent Luminaire



## Features

- Robust, lightweight and slimline construction.
- Tough GRP body and robust polycarbonate diffuser.
- Available as standard or emergency format.
- Twin channel control gear available.


## Special Features

IP65

IK10

Anti-corrosion, NO RUST!, NO PEELING!

Multi-point opening with tool

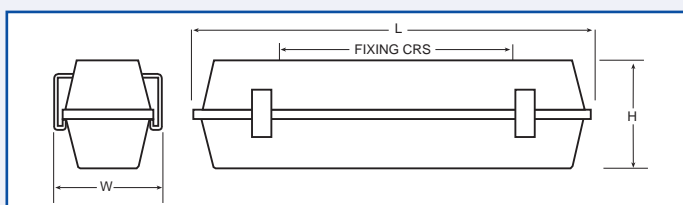

## Dimensions (carton size)

Type	Length	Width	Depth	Weight
RESILIENT218/HF & EM	700(780)	170(200)	100(180)	3kg (4 EM)
RESILIENT136/HF & EM	1310	100	100	4 (5 EM)
RESILIENT236/HF & EM	1310(1500)	170(200)	100(180)	4.5 (5.5 EM)
RESILIENT158/HF & EM	1620	100	100	4.5 (6 EM)
RESILIENT258/HF & EM	1620 (1700)	170(200)	100(180)	5 (6.5 EM)

## Technical Data

Model range	Twin 18w, 36w, 58w standard & emergency. Single 36w, 58w standard & emergency.
Supply voltage	H.F. Electronic ballast 220-250v 50-60Hz
Control gear	Integral including ballast, charger/inverter & 3 hour battery pack.
Weatherproof	IP65
Impact Resistance	IK 10
Mounting facilities	Drill through rear bolt fixing (2 x M8)
Cable entries	2 x M20 (1 plugged).
Terminals	3 wire & earth for 2.5mm <sup>2</sup> .
Material	U.V. stabilized and shock resistant polycarbonate, Grp body, stainless steel fastenings.

## Sales and Technical Support

Please contact PFP for any technical advice you may require including photometric details.  
A technical design service is available for all our customers.

**PFP**  
Petrel Fitter & Poulton

Tel: +44 (0) 121 783 7161 • Fax: +44 (0) 121 783 5717  
www.pfp-elec.co.uk • sales@pfp-elec.co.uk